

GXSPt\$ - Set Program Title

The GXSPt\$ routine is used to update the Program Title text on the current window.

1. Invocation

To set the Program Title text code:

```
CALL GXSPt$ USING text
```

where *text* is the text-string **WHICH MUST BE TERMINATED WITH A BINARY ZERO** (i.e. a byte of LOW-VALUES).

2. STOP Codes and Exception Conditions

The following STOP codes may be generated by GXSPt\$:

STOP code	Description
14421	GXSPt\$ has been called by an application that is not running on GX.
14422	An internal error has occurred (the text string was longer than 8Kb)


The following exception conditions may be returned by GXSPt\$:

EXIT code	\$\$COND	Description
14406	6	An internal error has occurred (GXSPt\$ was unable to allocate an additional temporary data page)

3. Programming Notes

GXSPt\$ is only available when running on GX. Any attempt to use GXSPt\$ on a non-GX terminal will result in a STOP code.

The following screen shot illustrates the difference between GXSPt\$ and GXSWC\$:

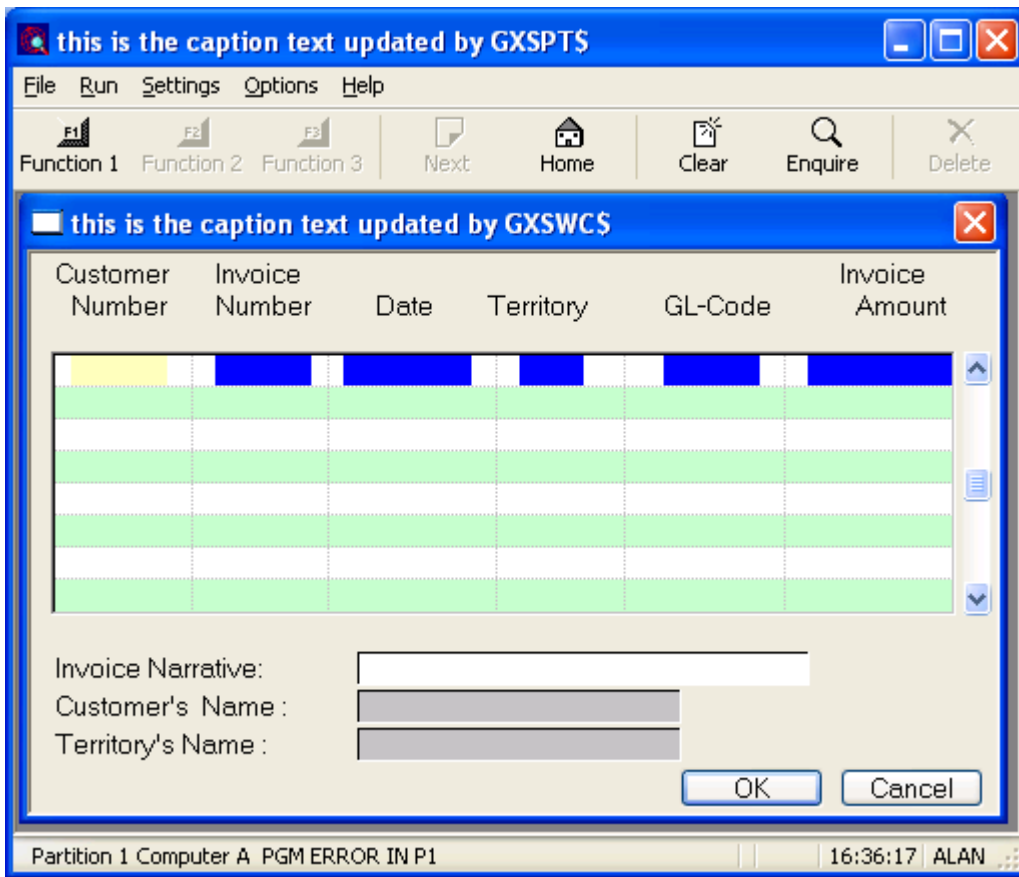

4. Examples

None.

5. Copy-Books

None.

6. See Also

GXSWC\$ Set GX Window caption text